



MacLean Power Systems

Link Style Pole Bands




Link style pole bands provide an ideal product for guying and deadending to steel, wood or concrete poles (non-square) without the need for bolt holes in the pole. The bands will accommodate pole diameters from a minimum of 8" through a virtually unlimited maximum pole diameter.

Features

- Available in 15,000 lbs and 30,000 lbs Tensile Strength Rating
- Supplied with up to 4 links with connecting eye used for terminating points to deadend and guy
- One "CLP" clip included - allows a 4" take up adjustment of band assembly. Additional CLP can be ordered for additional adjustment
- Full and half links are available to order for additional adjustments

Material

Links: Ductile iron hot dip galvanized
 Hardware: Steel hot dip galvanized
 Cotter Key: Stainless steel

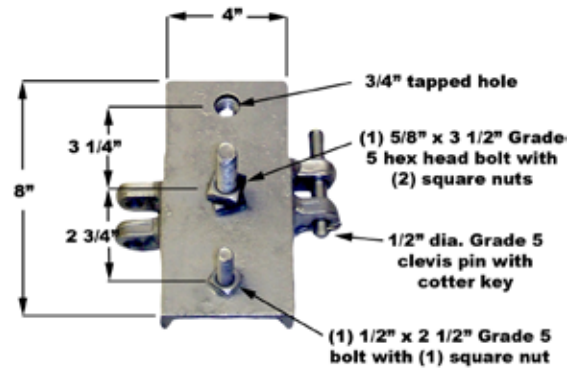

Mounting Bracket

This mounting bracket is used with the UCB 15,000 lb pole bands for mounting messenger suspension clamps in telecommunication construction applications and crossarm or electrical equipment for power applications.

Catalog Number	Weight (lbs)
SF-TEL-8	7.0




PEL Eye Link

This PEL Eye Link includes an integral eye for guying and deadend connections.

Catalog Number	Tensile Strength Ratings (lbs)	Eye Hole Dia (in)	Weight (lbs)
PEL-15	15000	15/16	2.3
PEL-30	30000	15/16	4.0



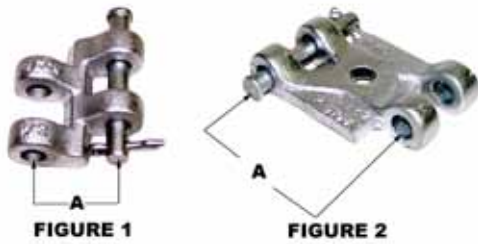

Links

Additional half links and full links are available to add to the pole band to increase its pole diameter size

Catalog Number	Tensile Strength Ratings (lbs)	A	Fig	Weight (lbs)
P-1/2	15000	1 11/16	1	1.0
P1/2-30	30000	2 3/16	1	2.0
P	15000	3 7/16	2	1.5
P-30	30000	3 7/16	2	3.0



CLP Style Clip

Additional CLP Clips are available for further pole diameter adjustment.



Catalog Number	Tensile Strength Rating (lbs)	Weight (lbs)
CLP-2	15000	5.0
CLP30-2	30000	10.0



UCB	-	XX	-	XX
Tensile Strength Rating (lbs)		Pole Diameter (in)		E = Includes 1 eye link
UCB = 15000		Please Specify		2E = Includes 2 eye links
UCB30 = 30000				